


LED Corn Light – IC Series (Mogul E39 Base)

FEATURES & SPECIFICATION SHEET

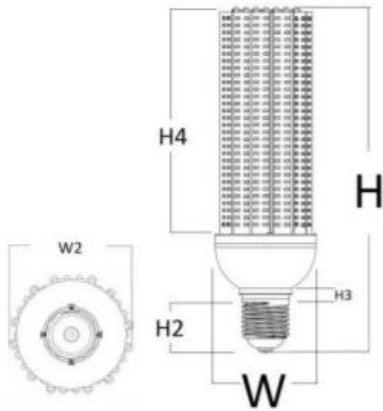

Application

The LED Corn Light, IC-IP64 Series is designed to replace High Pressure Sodium (HPS), Metal Halide (MHL), High Intensity Discharge (HID) and Compact Fluorescent (CFL) lamps.

Suitable for use in Post Top, High Bay, Area Lighting, Parking Lots, Street Lighting and much more.

Features


- 360° beam angle, E26 / E39 Base
- Direct to AC (Direct Wire) connection
- 120 Lm/Watt LED Array
- Designed for use in open or enclosed fixtures
- Durable Aluminum Construction
- IP64 Rated
- UL Listed, DLC Certified

LED PCB & Driver

A long lifecycle rating of 50,000 hours

Warranty

Lamp is guaranteed for 5 years against manufacturing defects.

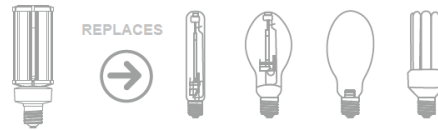

Ordering Information

IC40 - 5K

Model Color

MODEL	*COLOR TEMP	WATTS	VOLTS	BASE	LUMENS	REPLACES (HPS MHL HID)	DIMENSIONS					
							H	H2	H3	H4	W	W2
IC15	5000k	15w	120-277V	E39	1800Lms	50w	6"	1.1"	0.4"	3.1"	2.7"	2.2"
IC20	5000k	20w	120-277V	E39	2400Lms	100w	5.6"	1.1"	0.4"	2.7"	2.7"	3.1"
IC30	5000k	30w	120-277V	E39	3600Lms	150w	6.4"	1.1"	0"	3.1"	3.5"	2.6"
IC40	5000k	40w	120-277V	E39	4800Lms	250w	8.5"	1.1"	0.4"	4.6"	3.5"	2.8"
IC60	5000k	60w	120-277V	E39	7200Lms	300w	10.7"	1.6"	0.6"	6"	3.5"	2.8"
IC80	5000k	80w	120-277V	E39	9600Lms	350w	9.8"	1.6"	0"	5.5"	4.4"	3"
IC100	5000k	100w	120-277V	E39	12000Lms	400w	11.1"	1.6"	0.6"	5.8"	4.4"	3"
IC120	5000k	120w	120-277V	E39	14400Lms	600w	11.5"	1.6"	0.8"	6"	4.9"	3.3"
IC150	5000k	150w	120-277V	E39	18000Lms	800w	13"	1.8"	0.8"	8.3"	4.9"	4.3"

(*Available Color Temp Range 3000k – 6500k on request.)

InductionLightingFixtures.com

Toll Free: 855-453-2852 | Email: info@inductionlightingfixtures.com