

LED Corn Light – ICM Series (Medium E26 Base)


FEATURES & SPECIFICATION SHEET



Lower Wattages



Higher Wattages



Ordering Information

ICM40 - 5K

Model Color

Application

The LED Corn Light, IC-IP64 Series is designed to replace High Pressure Sodium (HPS), Metal Halide (MHL), High Intensity Discharge (HID) and Compact Fluorescent (CFL) lamps.

Suitable for use in Post Top, High Bay, Area Lighting, Parking Lots, Street Lighting and much more.

Features


- 360° beam angle, E26 / E39 Base
- Direct to AC (Direct Wire) connection
- 135 Lm/Watt LED Array
- Designed for use in open or enclosed fixtures
- Durable Aluminum Construction
- IP64 Rated
- UL Listed, DLC Certified

LED PCB & Driver

A long lifecycle rating of 50,000 hours

Warranty

Lamp is guaranteed for 5 years against manufacturing defects.

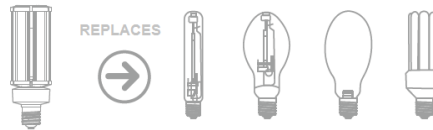

MODEL	*COLOR TEMP	WATTS	VOLTS	BASE	LUMENS	REPLACES (HPS MHL HID)	DIMENSIONS					
							H	H2	H3	H4	W	W2
ICM15	5000k	15w	120-277V	E26	2025Lms	50w	6"	1.1"	0.4"	3.1"	2.7"	2.2"
ICM20	5000k	20w	120-277V	E26	2700Lms	100w	5.6"	1.1"	0.4"	2.7"	2.7"	3.1"
ICM30	5000k	30w	120-277V	E26	4050Lms	150w	6.4"	1.1"	0"	3.1"	3.5"	2.6"
ICM40	5000k	40w	120-277V	E26	5400Lms	250w	8.5"	1.1"	0.4"	4.6"	3.5"	2.8"
ICM60	5000k	60w	120-277V	E26	8100Lms	300w	10.7"	1.6"	0.6"	6"	3.5"	2.8"
ICM80	5000k	80w	120-277V	E26	10800Lms	350w	9.8"	1.6"	0"	5.5"	4.4"	3"
ICM100	5000k	100w	120-277V	E26	13500Lms	400w	11.1"	1.6"	0.6"	5.8"	4.4"	3"
ICM120	5000k	120w	120-277V	E26	16200Lms	600w	11.5"	1.6"	0.8"	6"	4.9"	3.3"
ICM150	5000k	150w	120-277V	E26	20250Lms	800w	13"	1.8"	0.8"	8.3"	4.9"	4.3"

(*Available Color Temp Range 3000k – 6500k on request.)

InductionLightingFixtures.com

Toll Free: 855-453-2852 | Email: info@inductionlightingfixtures.com