


IAF INDUCTION POLE / POST TOP ACORN LIGHT

FEATURES & SPECIFICATION SHEET

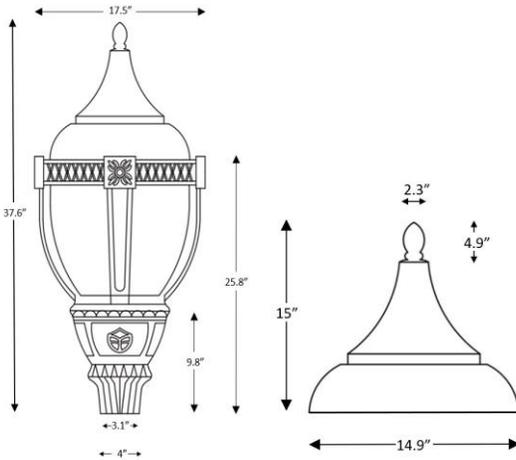

Application

The IAF series Acorn fixture is an ideal choice for replacement of common HPS and Mercury Vapor area-lighting fixtures. Its electronic ballast features a high >0.98 power factor for cool, efficient, flicker-free operation. Common applications include Parks, shopping malls, outlets, plazas, city halls and historic areas.

Features

- IP65 Rated
- Standard 2" pole mount
- Acrylic Lens with aluminum construction
- UL Listed

Performance


A long lifecycle rating of 100,000 hours

Warranty

All Induction Luminaires are guaranteed for 5 years against manufacturing defects.

(Pole Not Included)

MODEL	WATTS	*COLOR TEMP	VOLTS U = 120- 277v	RETROFIT WATTS	LUMENS	DIMENSIONS (W x L)
IAF40	40w	5000k	U	100W	3200Lms	17.5" x 37.6"
IAF60	60w	5000k	U	125W	4800Lms	17.5" x 37.6"
IAF80	80w	5000k	U	175W	6500Lms	17.5" x 37.6"
IAF100	100w	5000k	U	200W	8100Lms	17.5" x 37.6"
IAF120	120w	5000k	U	250W	9600Lms	17.5" x 37.6"
IAF150	150w	5000k	U	300W	12000Lms	17.5" x 37.6"
IAF200	200w	5000k	U	400W	16500Lms	17.5" x 37.6"




Options

Part #	Description
IL-SPD10A-120	Surge/Spike module 120-277v
IL-SPD20A-480	Surge/Spike module 480v
ISENP2	Photocell Day/Night Sensor - PIR
IL-AG6503L3	Panel Mounted Surge Device
IMPT3, 4, 5	Post Top Tenon Mount - Round
IMPT1, 2	Post Top Tenon Mount - Square




Distribution


Road Simulated Diagram



Illumination Curve



Luminance Distribution



Packaging

Product Box:
16" x 16" x 28"
1 Fixture

Contents:
Fixture - 1
Lid/Finial - 1
Induction Array - 1
Mounting Hardware - 1

