




EcoLightingUSA

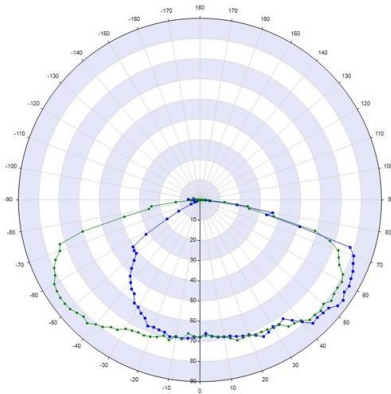

Ordering Information	
LXR60	- 35k
Model	Color

MODEL	COLOR TEMP	WATTS	LUMENS	PV	LiPo Batt	DIMENSIONS
LXR30	3k/5k	30	3000	8.8v/10w		12.75" L x 10.25" W x 4.0" H
LXR60	3k/5k	60	6000	13.2V/16W		16.75" L x 10.25" W x 4.0" H
LXR90	3k/5k	90	9000	13.2V/20W		20.75" L x 10.25" W x 4.0" H

DIRECTLED – All-In-One Smart Solar – LXR Series

FEATURES & SPECIFICATION SHEET

Application

The LXR Series All-In-One Compact Solar Powered LED Area Lamp is a standalone solution specifically designed for Walkways, Parking Lots, Street Lighting and Area Lighting Applications. All Units come with integrated solar panel and Lithium Ion Battery with Programmable Motion Detection and Dimming. The True Stand-Alone Solution. No wiring infrastructure necessary.

Features

- Integrated Solar Array, Lithium Polymer (LiPo) Battery, LED Array and Smart Solar Controller and Motion Sensor with LED Display
- IP65/IK08
- Lithium Ion 12v 15AH Battery, 13v 20w Solar Array, 3000-9000 Lm Sensing (3) Time Control + PIR Motion Sensing
- Discharge 10-12Hr/Night, Full Charge Time 8 Hr in Direct Sunlight, 5-7 Rainy Days
- Beam Angle 170°
- CRI <80
- 3000K/5000 CCT

LED Array, Lithium ION Cell & Solar Controller

A long lifecycle rating of 60,000 hours or about 15 years operating hours 12 hours per 7 days/week. LED array and Controller features Class P, IP65 rating. Suggested installation height is between 10 and 25 feet.

Warranty

LXR Solar Fixture is guaranteed for 5 years against Manufacturing defects.

EcoLightingUSA.com

Toll Free: (888) 326-9094 | Email: info@ecolightingusa.com | 217 Huyler Street, South Hackensack, NJ 07606