




## FI – INDUCTION OUTDOOR FLOOD LIGHT – SQUARE

### FEATURES & SPECIFICATION SHEET

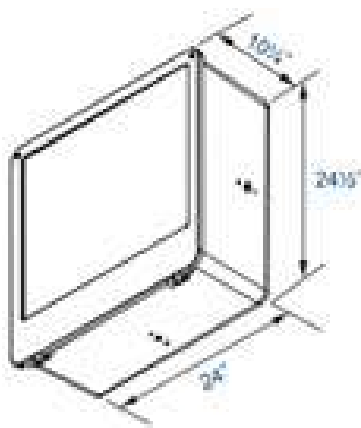

### Application

The FLDS series induction fixture is an ideal choice for replacement of common HPS and Metal Halide Area lighting fixtures. It has an electronic ballast that features a high >0.98 power factor for cool, efficient, flicker-free operation. Common applications include: Parks, shopping malls, outlets, plazas, city halls and historic areas.

### Features

- 24-inch Vandal Resistant Flood / Area Fixture
- Die Cast Aluminum Housing & Hinged Top Frame
- Bronze powder-coat finish over a chromate conversion coating
- Tempered flat clear glass lens with smooth reflector
- UL 1598 listed for wet locations
- Instant start and re-strike

### Performance

A long lifecycle rating of 100,000 hours

### Warranty

Fixture guaranteed for 5 years against Manufacturing defects.

MODEL	WATTS	*COLOR TEMP	VOLTS L = 120-277v	RETROFIT WATTS	LUMENS	DIMENSIONS W x D x L
FI80	80w	5000k	L	175W	6500Lms	24" x 10.25" x 24.5"
FI100	100w	5000k	L	250W	8100Lms	24" x 10.25" x 24.5"
FI120	120w	5000k	L	300W	9600Lms	24" x 10.25" x 24.5"
FI150	150w	5000k	L	400W	12000Lms	24" x 10.25" x 24.5"