




IL-FCS LED Retrofit Corn Light

FEATURES & SPECIFICATION SHEET

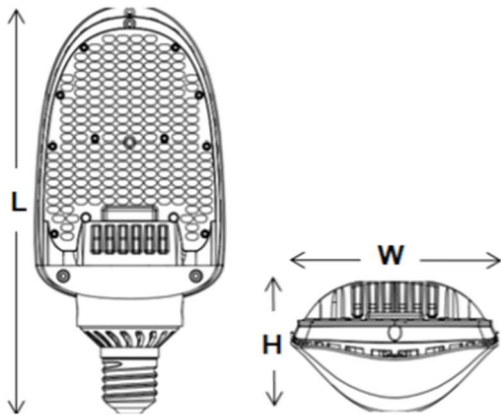

Application

The IL-FCS LED Retrofit Corn Light is designed to replace High Pressure Sodium (HPS), Metal Halide (MHL), High Intensity Discharge (HID) and Compact Fluorescent (CFL) lamps in existing light fixtures providing 60–90% in energy savings.

Suitable for use in: Shoeboxes, Flood lights, Wall packs, Canopies High Bay, Area Lighting, Parking Lots, Street Lighting and much more.

Features

- 180° beam angle
- Rotates 270° (flexible aiming / multiple fixture types)
- E26 / E39 Base (27w, 36w, 54w), E39 (75w, 95w, 115)
- Direct to AC (Direct Wire) connection
- High Lumen Output ≈ 140Lms/Watt
- IP54 Rated
- Designed for use in open or enclosed fixtures
- Durable Construction
- UL / CUL / DLC Listed


LED PCB & Driver

A long lifecycle rating of 50,000 hours

Warranty

Lamp is guaranteed for 5 years against manufacturing defects.

Ordering Information
ILFCS-54 - 5K - E26
 Model Color Base

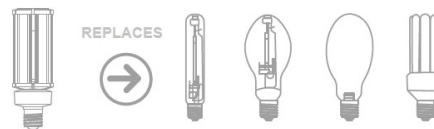

MODEL	*COLOR TEMP	BASE	VOLTS U – 120-277V	WATTS	LUMENS	REPLACES (HPS MHL HID)	DIMENSIONS E26 / E30
IL-FCS-27	5000k	E26/E39	U	27w	3726Lms	250w	9.2"/9.6"x4.4"x3.2"
IL-FCS-36	5000k	E26/E39	U	36w	4930Lms	360w	9.2"/9.6"x4.4"x3.2"
IL-FCS-54	5000k	E26/E39	U	54w	7700Lms	500w	9.2"/9.6"x5.4"x3.2"
IL-FCS-75	5000k	E39	U	75w	10500Lms	700w	11.7"x5.4"x3.4"
IL-FCS-95	5000k	E39	U	95w	13480Lms	900w	11.7"x5.4"x3.4"
IL-FCS-115	5000k	E39	U	115w	15860Lms	1000w	11.7"x5.4"x3.4"

(*Available Color Temp Range 3000k – 6000k on request.)