


IL3NCP LED GARAGE FIXTURE

FEATURES & SPECIFICATION SHEET

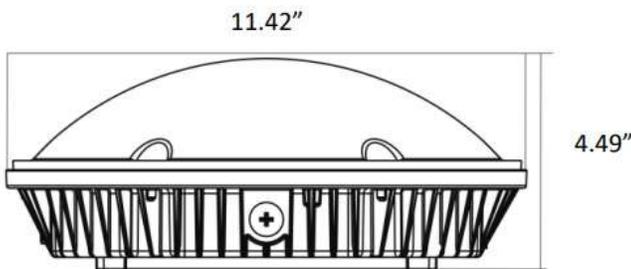

Application

The IL3NCP aluminum led garage fixture is an ideal choice for replacement of common High Pressure Sodium and Metal Halide Garage fixtures. Its electronic ballast features a high >0.98 power factor for cool, efficient, flicker-free operation. Common applications include: service hallways, parking garages, loading docks, stairwells, utility closets, gas stations, shopping malls, even certain retail and wholesale applications.

Features

- Die Cast Aluminum Housing
- 125 – 140 Lumens/Watt
- 10KV Surge Protection
- Replaces 150-320W MH/HPS
- IP65
- ETL listed
- Optional Photocell Motion Sensor

Performance

A long lifecycle rating of 50,000 hours

Warranty

Power supply guaranteed for 5 years.

MODEL	WATTS	*COLOR TEMP	VOLTS U = 120-277v	LUMENS	DIMENSIONS (W x L)
IL3NCP30	30w	5000k	U	3750-4200 Lms	11.42" x 4.5"
IL3NCP40	40w	5000k	U	5000-5600 Lms	11.42" x 4.5"
IL3NCP60	60w	5000k	U	7500-8400 Lms	11.42" x 4.5"