



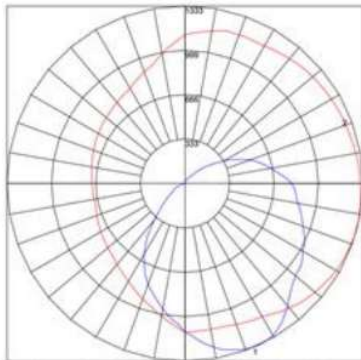

IWP/IWPM – Induction Wall Pack

FEATURES & SPECIFICATION SHEET

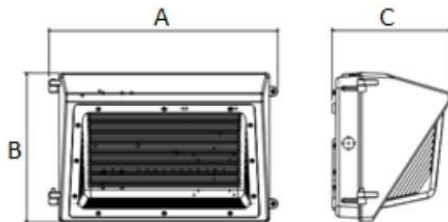

Maximum Candela = 1532/504 Located At Horizontal Angle = 345, Vertical Angle = 25
1 - Vertical Plane Through Horizontal Angles (345) - 1850 (Through Max. Cd.)
2 - Horizontal Plane Through Vertical Angle (25) (Through Max. Cd.)

Ordering Information

IWPM40 - 5K

Model Color

MODEL	COLOR TEMP	WATTS	LUMENS	REPLACES (HPS MHL HID)	DIMENSIONS L x W x D
IWPM40	5000k	40w	3200Lms	100w	14.25" x 9" x 7.25"
IWPM60	5000k	60w	4800Lms	120w	14.25" x 9" x 7.25"
IWP80	5000k	80w	6500Lms	160w	18.13" x 9" x 9.38"
IWP100	5000k	100w	8100Lms	200w	18.13" x 9" x 9.38"
IWP120	5000k	120w	9600Lms	250w	18.13" x 9" x 9.38"
IWP150	5000k	150w	12000Lms	400w	18.13" x 9" x 9.38"

Application

The IWP/IWPM series outdoor wall pack is an ideal choice for replacement of common HPS and Metal Halide Wall Pack fixtures. It contains an electronic ballast that features a high >0.98 power factor for cool, efficient, flicker-free operation.

Common applications include Parks, shopping malls, outlets, plazas, city halls and historic areas.

Features

- 120-277v
- Molded Prismatic Borosilicate glass lens with aluminum reflector
- Constructed of Die Cast aluminum housing with hinged frame
- IP65 Rated
- UL Listed

LED PCB & Driver

A long lifecycle rating of 100,000 hours

Warranty

Fixture is guaranteed for 5 years against manufacturing defects.