



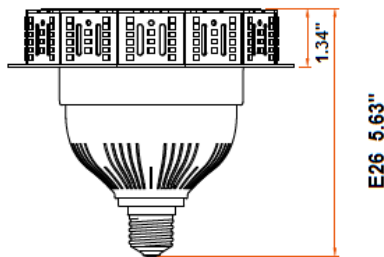

ICYG Series – Garage Retrofit

FEATURES & SPECIFICATION SHEET



Ordering Information

ICYG40	- 5K	- E39
Model	Color	Base

MODEL	*COLOR TEMP	BASE	WATTS	VOLTS U = 120-277V	LUMENS	REPLACES (HPS MHL HID)	DIMENSIONS (E26/E39 D x H)
ICYG30	5000k	E26 / E39	30w	U	4650	150w	6.5"x5.6"/6.0
ICYG40	5000k	E26 / E39	40w	U	6200	250w	6.5"x5.6"/6.0
ICYG60	5000k	E26 / E39	60w	U	9300	300w	6.5"x5.6"/6.0

(*Available Color Temp Range 3000k – 6500k (Warm to Cool) on request.)

Application

The ICYG (Low Profile) Series LED Garage Retrofit is designed to replace High Pressure Sodium (HPS), Metal Halide (MHL), High Intensity Discharge (HID) and Compact Fluorescent (CFL) lamps in existing light fixtures providing 60-90% in energy savings. Suitable for use in: Garage, High Bay, Area Lighting, Parking Lots, Street Lighting and much more.

Features

- 180° beam angle, E26 / E39 Base
- Direct to AC (Direct Wire) connection
- High Efficiency 155 Lm/Watt LED Array
- Designed for use in open or enclosed fixtures
- IP20, Low Profile
- Durable Construction
- ETL Listed

LED PCB & Driver

A long lifecycle rating of 50,000 hours

Warranty

Retrofit is guaranteed for 5 years against manufacturing defects.

