

# LED Corn Light – IC Series


## FEATURES & SPECIFICATION SHEET



**Lower Wattages**



**Higher Wattages**



### Application

The IC Series LED retrofit lamp is designed to replace Metal Halide (MHL), High Pressure Sodium (HPS) and Compact Fluorescent (CFL) lamps in existing light fixtures providing 60- 90% in energy savings. Suitable for use in Post Top, High Bay, Area Lighting, Parking Lots, Street Lighting and much more.

### Features


- 360 degree beam angle, E26 / E39 Base
- Direct to AC (Direct Wire) connection
- 140 Lm/Watt LED Array
- Designed for use in open or enclosed fixtures
- Durable Aluminum Construction
- UL Listed, DLC Certified
- Rated IP20

### LED PCB & Driver

A long lifecycle rating of 50,000 hours

### Warranty

Lamp is guaranteed for 5 years against manufacturing defects.

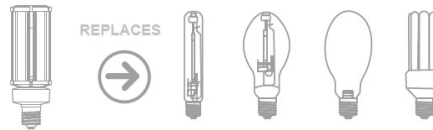

#### Ordering Information

**IC40 - 5K - E39**

Model	Color	Base
IC40	5K	E39

MODEL	*COLOR TEMP	BASE	WATTS	VOLTS	LUMENS	REPLACES (Metal Halide, HPS, CFL)	DIMENSIONS					
							H	H2	H3	H4	W	W2
IC15	5000k	E26/E39	15w	120-277V	2100Lms	50w	6"	1.1"	0.4"	3.1"	2.7"	2.2"
IC20	5000k	E26/E39	20w	120-277V	2800Lms	100w	5.6"	1.1"	0.4"	2.7"	2.7"	3.1"
IC30	5000k	E26/E39	30w	120-277V	4200Lms	150w	6.4"	1.1"	0"	3.1"	3.5"	2.6"
IC40	5000k	E26/E39	40w	120-277V	5600Lms	250w	8.5"	1.1"	0.4"	4.6"	3.5"	2.8"
IC60	5000k	E26/E39	60w	120-277V	8400Lms	300w	10.7"	1.6"	0.6"	6"	3.5"	2.8"
IC80	5000k	E26/E39	80w	120-277V	11200Lms	350w	9.8"	1.6"	0"	5.5"	4.4"	3"
IC100	5000k	E26/E39	100w	120-277V	14000Lms	400w	11.1"	1.6"	0.6"	5.8"	4.4"	3"
IC120	5000k	E26/E39	120w	120-277V	16800Lms	600w	11.5"	1.6"	0.8"	6"	4.9"	3.3"
IC150	5000k	E26/E39	150w	120-277V	21000Lms	800w	13"	1.8"	0.8"	8.3"	4.9"	4.3"

(\*Available Color Temp Range 3000k – 6500k on request.)

[InductionLightingFixtures.com](http://InductionLightingFixtures.com)

Toll Free: 855-453-2852 | Email: [info@inductionlightingfixtures.com](mailto:info@inductionlightingfixtures.com)